

## DATAMAN 8072DL HANDHELD BARCODE READER


Advanced image formation for direct part mark (DPM) codes

The DataMan® 8072 DPM Lite (DL) handheld barcode reader delivers powerful barcode reading performance for tough DPM codes on flat, highly reflective surfaces. It features the latest patented technology and advanced lighting and optics, ideal for automotive, aerospace, and medical device industry applications.

### Patented algorithms deliver powerful barcode reading performance

DataMan 8072DL handheld barcode readers are optimized with powerful algorithms and technologies to read DPM, as well as 1-D and 2-D label-based barcodes, in the most demanding industrial environments.

2DMax® with PowerGrid® technology is a breakthrough 2-D decoding algorithm, designed to read 2-D codes with significant damage to or complete elimination of a code's finder pattern, clocking pattern, or quiet zone.

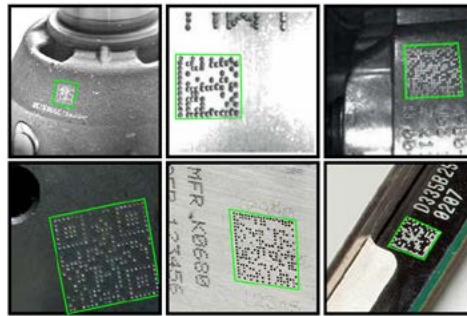

### Half-polarized lighting provides advanced image formation

The DataMan 8072DL is a standard-range barcode reader that deciphers codes from up to 30 centimeters (12 inches) away. This barcode reader has a 1.2-megapixel sensor and half-polarized lighting which illuminates codes on flat, highly reflective surfaces to acquire optimal code images.



### Robust, modular communications and ease-of-use

With the DataMan 8072DL handheld barcode reader, no configuration or adjustments are necessary. Codes can be read from a distance without angling the code or part.

Field-interchangeable communication modules easily integrate with factory networks, allowing each reader to be configured to meet specific communication needs. Coded RS-232, USB, and Ethernet options, as well as a cordless Bluetooth option, are available for DataMan 8072DL handheld barcode readers.

## SPECIFICATIONS

Algorithms/Technologies	1DMax, <sup>™</sup> Hotbars, <sup>®</sup> 2DMax, PowerGrid
Symbologies	1-D: UPC/EAN/JAN, Codabar, Interleaved 2 of 5, Code 39, Code 128, Code 93, Pharmacode, POSTNET, PLANET Code, GS1 Databar, IMB, Postal 2-D: Data Matrix, QR, MicroQR, PDF417, MaxiCode, Aztec, Micro PDF41
Imager	1.2 MP
Lens Type	Fixed lens
Trigger	Manual trigger
Aimer	LED aimer
Status Outputs	LED, beeper, and vibration
Lighting Options	Half-polarized and non-polarized
Communications	Serial module: RS-232, USB Ethernet module: TCP/IP, FTP, industrial protocols: Ethernet/IP, PROFINET, MC protocol, Modbus TCP Intelligent base station: RS-232, USB, Ethernet, industrial protocols Bluetooth module communicates to industrial Bluetooth base station
Power	Serial/USB: 5 V–6 V DC, 5.0 W maximum LPS or NEC Class 2 power supply Ethernet: PoE Class 2 power supply Bluetooth: 3.7 V, 3100 mAh Li-ion battery
Material	Polycarbonate housing with overmold
Weight	255 g
Dimensions	210 mm x 115 mm x 85 mm
Operating Temperature	0–40 °C (32–104 °F)
Storage Temperature	-40–60 °C (-40–140 °F)
Maximum Humidity	95% (non-condensing)
Protection	IP65
Drop Test	50 drops from 2 meters
RoHS Compliance	2011/65/EU
Approvals	UL60950-1 & CAN/CSA C22.2 No.60950-1-07, CE (EMC & RED), FCC Part 15, ICES-003, RSS-210 Issue 8, KCC
Operating System	Microsoft Windows <sup>®</sup> 7 and 10

# COGNEX

Companies around the world rely on Cognex vision and barcode reading solutions to optimize quality, drive down costs and control traceability.

Corporate Headquarters One Vision Drive Natick, MA 01760 USA

### Regional Sales Offices

#### Americas

North America +1 844-999-2469  
Brazil +55 (11) 2626 7301  
Mexico +01 800 733 4116

#### Europe

Austria +49 721 958 8052  
Belgium +32 289 370 75  
France +33 1 7654 9318  
Germany +49 721 958 8052

Hungary +36 800 80291  
Ireland +44 121 29 65 163  
Italy +39 02 3057 8196  
Netherlands +31 207 941 398  
Poland +48 717 121 086  
Spain +34 93 299 28 14  
Sweden +46 21 14 55 88  
Switzerland +41 445 788 877  
Turkey +90 216 900 1696  
United Kingdom +44 121 29 65 163

#### Asia

China +86 21 6208 1133  
India +9120 4014 7840  
Japan +81 3 5977 5400  
Korea +82 2 539 9980  
Malaysia +6019 916 5532  
Singapore +65 632 55 700  
Taiwan +886 3 578 0060  
Thailand +66 88 7978924  
Vietnam +84 2444 583358

© Copyright 2018, Cognex Corporation.  
DataMan, Hotbars, 2DMax, and PowerGrid are registered trademarks of Cognex Corporation. 1DMax is a trademark of Cognex Corporation. All other trademarks are property of their respective owners.  
Lit. No. DM8072DL-05-2018

[www.cognex.com](http://www.cognex.com)